



VHF MARINE TRANSCEIVER

IC-M88

Submersible

1m depth for 30 minutes

**Intrinsically safe
versions available**



Not Just Another Marine Radio!

Tough construction, superior waterproofing

The IC-M88 is built tough to withstand hazardous and un hospitable environments at sea and on land. Even if the IC-M88 is dropped into water, complete waterproofing* will protect it from harm. The compact and durable body meets the military specifications (MIL-STD).

* Equivalent to JIS waterproof grade 7. (1m depth for 30 minutes)

Simple operation

6 clearly labelled buttons on the front panel and the volume/power knob maximize simplicity of operation. Even when wearing gloves, the large buttons are easy to operate. A large, clear LCD with back-lighting and backlit buttons make night time operation simple.

Li-Ion battery for extra long battery life

With the standard 1700mAh Li-Ion battery pack, the BP-227, you can get up to 15 hours of talk time* without worrying about 'memory effect' on batteries. An optional AA alkaline battery case, BP-226, provides a convenient back up and great reassurance in an emergency.

* Typical operation; Tx:Rx:Stand-by duty ratio = 5:5:90

Waterproof speaker-microphone, HM-138

An optional waterproof speaker-microphone, the HM-138, provides reliable operation, even with the IC-M88 securely on your belt.


22 programmable channels for land use

The IC-M88 has 22 programmable channels reserved for Land use (146-174MHz). Wide/narrow channel spacing is programmable for each channel, and CTCSS and DTCS signaling is built-in.

*Appropriate license will be required.

Additional features

- Auto WX scan and WX Alert function (U.S.A. version only)
- Simple Up/Down switches for operating channel selection
- Instant access to Ch. 16 and Ch. 9 (or call channel)
- Simple add/delete TAG scanning operation
- Powerful 5W output
- 2 step power saver
- 4 level battery indicator
- The self check function checks internal temperature, connected battery voltage (over voltage detection), and water intrusion

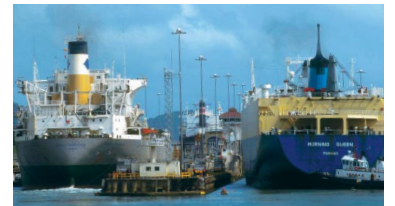

Icom Inc.

Intrinsically safe versions approved by Factory Mutual Research Corporation



There are versions that conform to intrinsically safe rating of the FMRC (Factory Mutual Research Corporation). It can be used in many hazardous marine environments such as petroleum tankers and bulk cargo carrier. Ask your dealer for details.

Intrinsically safe : Class I, II and III, Division 1, Groups C, D, E, F, and G, Nonincendive : Class I, Division 2, Groups A, B, C and D hazardous locations when used with Icom BP-227FM battery pack. "Max. Temp. T3C at 40°C"
Approved accessories: Speaker-microphone, HM-138

SPECIFICATIONS

GENERAL

- Frequency range :
 - Marine Tx 156.025–157.425MHz
 - Rx 156.050–163.275MHz
 - LMR Tx/Rx 146.000–174.000MHz
- Usable channels* (*Varies according to version):
 - All U.S.A., International and Canadian channels;
 - 22 LMR channels plus 10 weather channels
- Channel spacing :
 - Marine 25kHz
 - LMR 25/12.5kHz
- PLL channel step (LMR) : 5/6.25/7.5kHz
- Current drain (at 7.2V DC) :
 - Tx (at 5W output) 1.6A
 - Rx (at AF max.) 200mA
- Operating temp. range (except BP-227):
 - Marine -20°C to +60°C; -4°F to +140°F
 - LMR -30°C to +60°C; -22°F to +140°F
- Antenna impedance : 50Ω (SMA)
- Dimensions (W×H×D) : 62×97×39 mm; (proj. not included) 27¹/₁₆×3¹³/₁₆×1¹⁷/₃₂ in
- Weight (approx.; with BP-227): 280g; 9.9oz

TRANSMITTER

- Output power (Hi/Mid/Low) : 5/3/1W
- Max. frequency deviation :
 - Marine ± 5.0kHz
 - LMR (wide/narrow) ± 5.0/2.5kHz
- Audio harmonic distortion : Less than 10% (at 60% mod.)
- Spurious emissions : -70dBc typical
- Adjacent channel power :
 - Marine 70dB
 - LMR (wide/narrow) 70/60dB
- Hum and noise ratio :
 - Marine 40dB
 - LMR (wide/narrow) 40/34dB

RECEIVER

- Sensitivity (at 12dB SINAD) : 0.25μV typical
- Squelch sensitivity : 0.35μV typical (at threshold)
- Adjacent Ch. selectivity :
 - Marine 70dB typical
 - LMR (wide/narrow) 70/60dB typical
- Spurious response : 70dB typical

- Intermodulation rejection : 70dB typical
- Hum and noise ratio :
 - Marine 40dB
 - LMR (wide/narrow) 40/34dB
- Audio output power : 0.35W typical (at 10% distortion with an 8Ω load)

Applicable U.S. Military Specifications

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, III	506.3	I, II, III	506.4	I, II
Humidity	507.1	I, II	507.2	II, III	507.3	II, III	507.4	-
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	-
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

- Supplied accessories:** (*Varies according to version.)
- Battery pack • Battery charger • AC adapter*
 - Swivel belt clip • Antenna, FA-S59V • Hand strap

Measurement made in accordance with TIA/EIA-603. All stated specifications are subject to change without notice or obligation.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BP-226 BATTERY CASE

Battery case for AA (LR6)×5 alkaline cells. Water resistant, equivalent to JIS Grade 4.

BP-227/BP-227FM BATTERY PACK

7.2V/1700mAh Li-Ion battery pack. Provides 15 hours operating time* (approx. at 5 Watts). Same as supplied. Operating temp. range: -20°C to +60°C; -4°F to +140°F

* Tx (Hi): Rx: standby=5:5:90

BC-152 DESKTOP CHARGER

+ BC-147A/E AC ADAPTER
Regularly charges the BP-227, BP-227FM in 9-10 hours. Same as supplied.

BC-119N DESKTOP CHARGER

+ AD-100 CHARGER ADAPTER
+ BC-145A/E/V AC ADAPTER

For rapid charging of battery pack. An AC adapter is supplied depending on version. Charging time: 2.5-3 hours.

BC-121N MULTI-CHARGER

+ AD-100 CHARGER ADAPTER

+ BC-124 AC ADAPTER
For rapid charging of up to 6 battery packs (Six AD-100s are required). Charging time: 2.5-3 hours.

CP-17L CIGARETTE LIGHTER

CABLE WITH NOISE FILTER

OPC-515L DC POWER CABLE

For use with the battery charger, BC-152 or BC-119N, instead of the AC adapter. (12-16 V DC required)

OPC-656 DC POWER CABLE

For use the BC-121N with a DC power supply. (12-16V DC required)

HM-138 SPEAKER-MICROPHONE

Full sized, waterproof construction corresponds to JIS grade 7 (1 m/30 min.).

MB-86 SWIVEL BELT CLIP

Swivel belt clip. The same as that supplied.

MB-98 BELT CLIP

Alligator type belt clip.

MB-96 LEATHER BELT HANGER

Swivel type belt hanger for use with MB-86.

MB-96F LEATHER BELT HANGER

Fixed type belt hanger for use with MB-98.



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : +1 (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266 Fax: +1 (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: +61 (03) 9387 0666 Fax: +61 (03) 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: +64 (09) 274 4062 Fax: +64 (09) 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: +49 (0211) 346047 Fax: +49 (0211) 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Crta. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, Spain
Phone: +34 (93) 590 26 70 Fax: +34 (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: +44 (01227) 741741 Fax: +44 (01227) 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: +33 (5) 61 36 03 03 Fax: +33 (5) 61 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899 Fax: +886 (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road, Beijing, China
Phone: +86 (010) 6866 6337 Fax: +86 (010) 6866 3553
URL : <http://www.bjicom.com>



Icom Inc. (Japan), is an ISO 9001 and ISO 14001 certification acquired company.

Your local distributor/dealer: